


DISC Lite5 ac

The DISC is a low cost high gain 5 GHz CPE. We have improved antenna design, added Gigabit Ethernet port and 802.11a/n/ac support to achieve even more speed on longer distances.

DISC Lite5 ac is equipped with 21 dBi dual chain antenna, 802.11a/n/ac integrated wireless, 716 MHz CPU, 256 MB RAM, 1x Gigabit Ethernet port and RouterOS Level 3 license. It comes complete with a power supply, Gigabit PoE injector and a mounting ring. The device is also compatible with our SXT mounting systems, including the quickMOUNT pro series.

The RouterOS Level 3 allows to use the DISC Lite5 ac as a CPE or for 5 GHz Point-to-Point links.

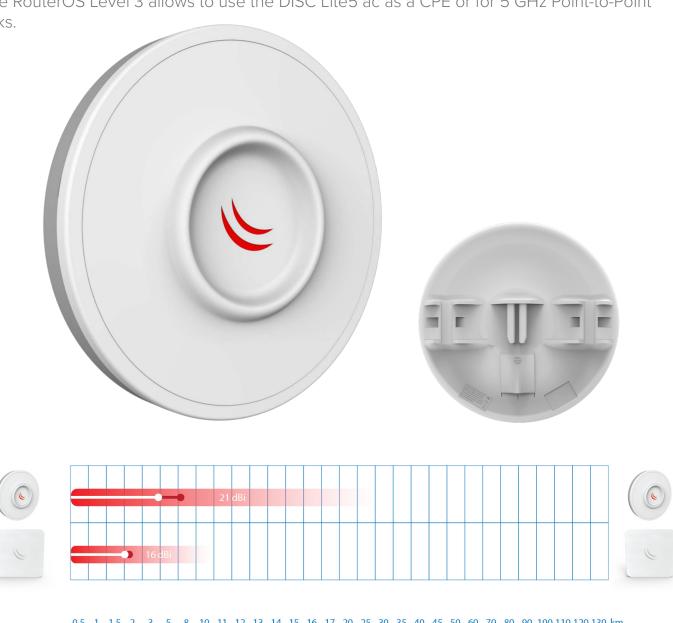

 $0.5 \quad 1 \quad 1.5 \quad 2 \quad 3 \quad 5 \quad 8 \quad 10 \quad 11 \quad 12 \quad 13 \quad 14 \quad 15 \quad 16 \quad 17 \quad 20 \quad 25 \quad 30 \quad 35 \quad 40 \quad 45 \quad 50 \quad 60 \quad 70 \quad 80 \quad 90 \quad 100 \ 110 \ 120 \ 130 \ km$

Distance at max supported 802.11ac data rate (eg. 866Mbit) Distance at max supported 802.11n data rate (eg. 300Mbit) Max range at -70 signal

Note: line of sight, interference, alignment, weather and other outside factors will affect the wireless link performance and possible distance



Specifications

| Product code | RBDiscG-5acD (International) RBDiscG-5acD-US (USA) |
|-----------------------|---|
| CPU | IPQ-4018 716 MHz |
| CPU core count | 4 |
| RAM | 256 MB |
| Storage type | Flash |
| Storage size | 16 MB |
| Ethernet | One 10/100/1000 Mbps Ethernet port with Auto-MDI/X |
| Wireless | IPQ-4018, wireless built-in 5 GHz 802.11ac, dual chain |
| Wireless regulations | Specific frequency range may be limited by country regulations |
| Frequency range | International: 5150 MHz-5875 MHz USA: 5170-5250 MHz; 5725-5835 MHz |
| Power options | Passive PoE input 10 - 30 V |
| Consumption | 7 W |
| Antenna gain | 21 dBi |
| Antenna beam width | 12° |
| Dimensions | ø 265mm, height: 80mm |
| Operating temperature | -40°C +70°C tested |
| LEDs | 8x LEDs (5x user LEDs) |
| License level | 3 |
| Operating system | RouterOS |

Wireless specifications

| Rate | Tx | Rx |
|----------|----|-----|
| 6MBit/s | 25 | -96 |
| 54MBit/s | 21 | -80 |
| MCS0 | 25 | -96 |
| MCS7 | 20 | -75 |
| MCS9 | 18 | -70 |

| Antenna type | Short backfire |
|------------------------|----------------|
| Antenna gain | 21 dBi |
| Port-to-port isolation | 20 dB |
| Front-to-back ratio | 30 dB |
| Side lobe level | 15 dB |

ncluded



24 V 0.38 A



Metal ring

