


# RB2011L



RB2011L-IN

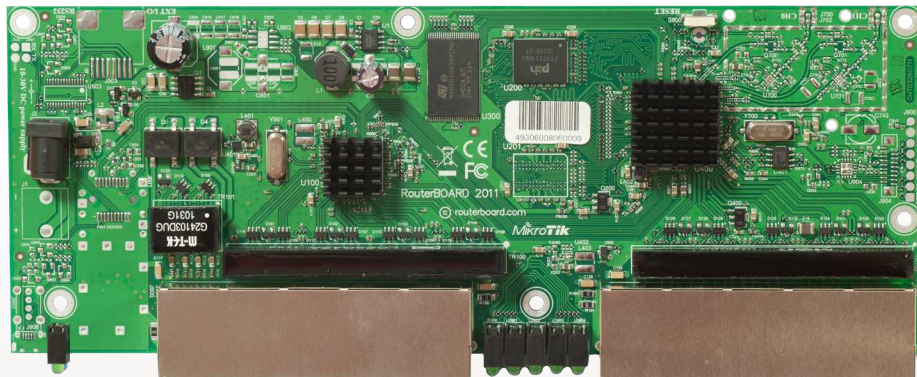

RB2011L



RB2011L-RM

The RB2011L is a low cost multi port device series. Designed for indoor use, and available in many different cases, with a multitude of options.

The RB2011L series includes five models, RB2011L, RB2011L-IN (Desktop case) and RB2011L-RM (rackmount case), RB2011LS (adds SFP port) and RB2011LS-IN (LS in desktop case).

It's powered by the new Atheros 600MHz 74K MIPS network processor and has 64MB of RAM and a Level4 RouterOS license.

CPU	Atheros AR9344 600MHz
Memory	64MB DDR SDRAM onboard memory
Ethernet	Five 10/100 Mbit Fast Ethernet ports with Auto-MDI/X Five 10/100/1000 Mbit Gigabit Ethernet ports with Auto-MDI/X
Expansion	<i>RB2011LS model:</i> SFP port
Extras	Reset button, Reset jumper
LEDs	Power, User, Ethernet activity
Power input	Jack 8-28V DC; PoE: 8-28V DC on Ether1 (Non 802.3af).
Power output	<i>For RB2011L-RM only:</i> 580mA on Port 10
Board dimensions	214 mm x 86 mm, Weight: 146g
Power consumption	8W max
Operating System	MikroTik RouterOS, L4 license
Package includes	RB2011; For IN and RM model also indoor case and power supply.

Feature / Model	2011L	2011L-IN	2011L-RM	2011LS	2011LS-IN
Enclosure	-	Desktop	Rackmount	-	Desktop
SFP port	-	-	-	Yes	Yes
Power output	-	on port 10	-	-	-
USB	-	-	-	-	-
Wireless	-	-	-	-	-